


## PRODUCT DATA SHEET

### DESCRIPTION

Toray PMC CFRT® (TW-2000 1L & 2L) is a reinforced thermoplastic composite laminate. It blends the benefits of a thermoplastic polymer matrix with woven carbon fibers in a twill weave for enhanced performance. The TW-2000 1L & 2L style laminate is available in a single or multilayer product; carbon fiber reinforcement at 0° and 90° orientations that is ultra-thin, lightweight, and resilient for improved energy return.

### FEATURES

- › Twill weave of 12K carbon fibers
- › Bi-directional carbon reinforcement
- › Lightest weight and thin
- › Color: Black (natural carbon)

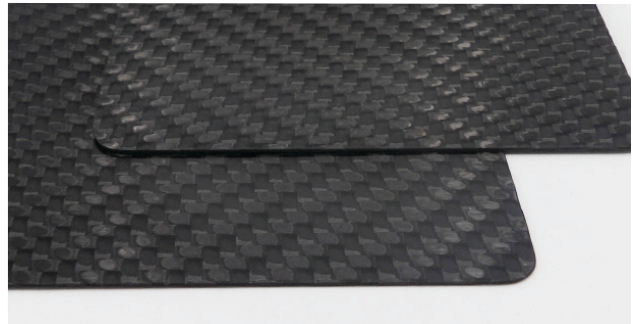

### PRODUCT TYPE AND COMPOSITION

Carbon (12K) fiber content: 58%  
Modified PMMA thermoplastic resin: 42%  
(Noted: Percentages are by volume and are nominal values)

### TYPICAL APPLICATIONS

- › Footwear
- › Recreational equipment
- › Skates

### SHELF LIFE

Stable indefinitely at 25°C (77°F)

Materials must be dried prior to heating and thermoforming.  
Please refer to the TPMC Processing Instructions.


### MATERIAL PARAMETERS

Specific Gravity	1.44 ± 0.15 (calculated based upon material volume)
Thickness	Available in single or multiple laminates
Size	Cut to customer specifications from sheet of 91 x 122 cm (36 x 48 inches)
Standard Colors	Black (natural carbon)
Forming Temperature	195°C to 200°C (383°F–392°F)
Bonding Temperature	55°C to 60°C (131°F–140°F)



Contact us for more information:  
**e** [contact@toraypmc.com](mailto:contact@toraypmc.com)  
**t** +1 805 482 1722 (USA)

## PRODUCT DATA SHEET

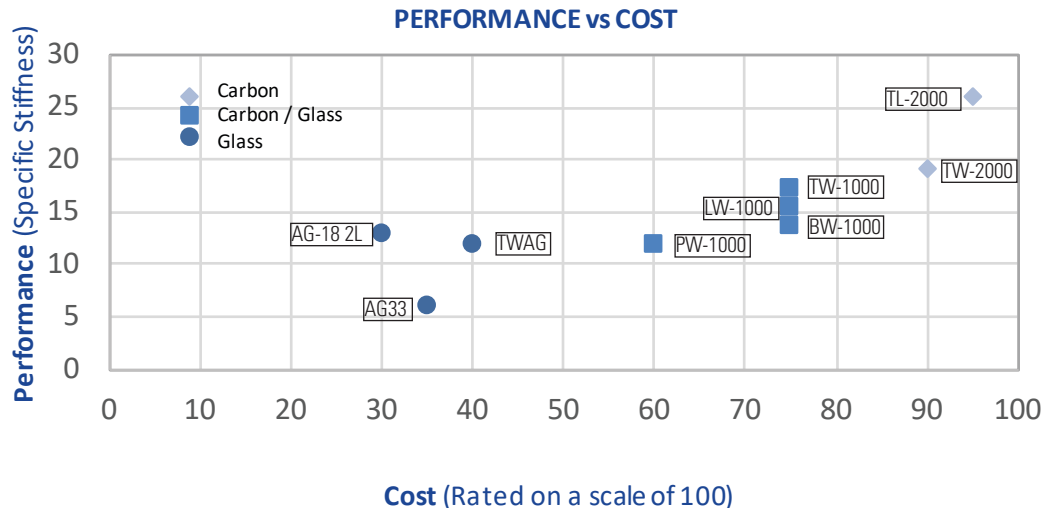

## MECHANICAL PROPERTIES

Properties	Condition	Method	1L** Results:	2L*** Results:
Flexural Rigidity	RTD	ASTM D790-10	~ 14.5 N-cm	~ 17.5 N-cm
Flexural Modulus	RTD	ASTM D790-10	~ 22.8 GPa	~ 35.1 GPa
Flexural Strength	RTD	ASTM D790-10	> 450 MPa	> 530 MPa
Thickness	—	*SI-QA-047	0.70 mm ± 0.15 mm	1.27 mm ± 0.15 mm

\*SI-QA-047 is an internal Toray PMC inspection process

Note: Material properties and thickness listed above are of the base panel without ENVIR-Bond® layers.

\*\*Tested at 0.67 mm thickness

\*\*\*Tested at 1.32 mm thickness

Revised 12/2020

Toray(TW-2000 1L&2L)\_DS\_v7\_2020-12-01 Page 2/2

© 2020. All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are processed and tested are key to their performance, and Toray Performance Materials Corporation has no assurance of how its customers will use the material, the corporation cannot guarantee these properties. Toray®, (Toray) CFRT®, and all other related characters, logos, and trade names are claims and/or registered trademarks of Toray Industries Inc. and/or its subsidiary companies in one or more countries. Use of trademarks, trade names, and other IP rights of Toray Industries Inc. without prior written approval by such is strictly prohibited.