


PRODUCT DATA SHEET

DESCRIPTION

Toray Cetex® TC940 is a thermoplastic composite using a semi-crystalline polyethylene terephthalate (PET) matrix resin. This product offers good impact resistance and stiffness, at a relatively low cost. It is typically used in recreational and sporting goods applications because of its exceptional durability and high interlaminar short beam shear results.

FEATURES

- ▶ Good toughness
- ▶ Good chemical and solvent resistance
- ▶ Lightweight
- ▶ Excellent clarity and toughness
- ▶ Good overall strength

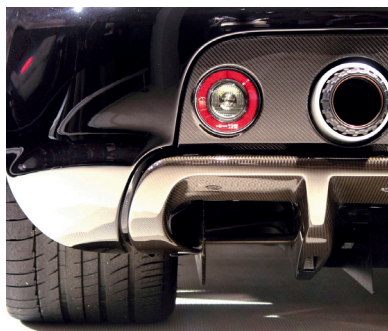

PRODUCT TYPE

Engineered Polyethylene Terephthalate Composite

TYPICAL APPLICATIONS

- ▶ Industrial applications
- ▶ Recreational applications
- ▶ Sporting goods

SHELF LIFE

Indefinite at 25°C (77°F)

TYPICAL NEAT RESIN PROPERTIES

Density	1.3 g/cc
Tensile Strength	79 MPa (11.5 ksi)
Tensile Modulus	0.7 GPa (0.1 Msi)
Elongation at Break	70%
Strain at Yield	15%
UL94 Flammability	HB
Melt Temperature	254°C (490°F)
Heat Deflection Temperature	70°C (158°F) at 0.46 MPa (66 psi)



Contact us for more information:

North America/Asia/Pacific

e explore@toraytac-usa.com

t +1 408 465 8500

Europe/Middle East/Africa

e explore@toraytac-europe.com

t +44 (0)1773 530899

PRODUCT DATA SHEET

MECHANICAL PROPERTIES

Properties	Condition	Method	Typical Results	
Tensile Strength 0°	RTD	ASTM D 3039	960 MPa	139 ksi
Tensile Modulus 0°	RTD	ASTM D 3039	32.0 GPa	4.6 Msi
Flexural Strength 0°	RTD	ASTM D 790	1215 MPa	176 ksi
Flexural Modulus 0°	RTD	ASTM D 790	32.2 GPa	4.7 Msi
Compressive Strength 0°	RTD	ASTM D 3410	329 MPa	48 ksi
Short Beam Shear ILSS	RTD	ASTM D 2344	41 MPa	6.0 ksi

Toray Cetex® TC940 Fiberglass Fiber PET Unitape
 Resin content by weight at 40%. Composite density 1.89 g/cm³.
 Tape width 166 mm (6.5"). Tape thickness 0.26 mm (0.010").

MECHANICAL PROPERTIES

Properties	Condition	Method	Typical Results	
Tensile Strength 0°	RTD	ASTM D 3039	1272 MPa	184 ksi
Tensile Modulus 0°	RTD	ASTM D 3039	94.2 GPa	13.7 Msi
Flexural Strength 0°	RTD	ASTM D 790	825 MPa	120 ksi
Flexural Modulus 0°	RTD	ASTM D 790	80.2 GPa	11.6 Msi
Compressive Strength 0°	RTD	ASTM D 3410	271 MPa	39 ksi
Short Beam Shear ILSS	RTD	ASTM D 2344	35.8 MPa	5.2 ksi

Toray Cetex® TC940 Carbon Fiber PET Unitape
 Resin content by weight at 40%. Composite density 1.53 g/cm³.
 Tape width 166 mm (6.5"). Tape thickness 0.25 mm (0.010").
 Recommended processing temperature is 254–277°C (490–530°F)

Revised 07/2019

TORAY_TC940_PDS_v4.0_2019-07-12 Page 2/2

© 2019. All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are processed and tested are key to their performance, and Toray Advanced Composites has no assurance of how its customers will use the material, the corporation cannot guarantee these properties. Toray®, (Toray) AmberTool®, (Toray) Cetex®, (Toray) MicroPly™, and all other related characters, logos, and trade names are claims and/or registered trademarks of Toray Industries Inc. and/or its subsidiary companies in one or more countries. Use of trademarks, trade names, and other IP rights of Toray Industries Inc. without prior written approval by such is strictly prohibited.