


PRODUCT DATA SHEET

DESCRIPTION

Toray PMC CFRT® (AG-7544 2L) is a reinforced thermoplastic composite laminate. It blends the benefits of a thermoplastic polymer matrix with woven glass fibers in a plain weave for enhanced performance. The AG-7544 2L style laminate is available in a dual-layer product with glass fibers in both directions (0° & 90°). This construction is ultra-thin, lightweight, and resilient for improved energy return.

FEATURES

- › Modified plain weave of glass fibers
- › Bi-directional glass reinforcement
- › Light weight, thin, multiple layers
- › Available in various colors

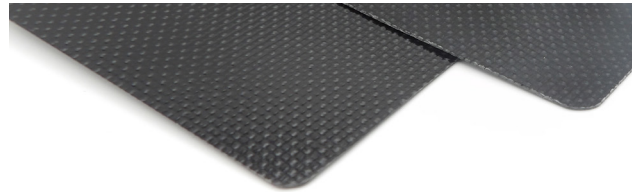

PRODUCT TYPE AND COMPOSITION

Glass (330) fiber content: 65%
Modified PMMA thermoplastic resin: 35%
(Noted: Percentages are by volume and are nominal values)

TYPICAL APPLICATIONS

- › Footwear
- › Recreational equipment
- › Skates

SHELF LIFE

Stable indefinitely at 25°C (77°F)

Materials must be dried prior to heating and thermoforming.
Please refer to the TPMC Processing Instructions.

MATERIAL PARAMETERS

Specific Gravity	1.8 ± 15% (Calculated based upon material volume)
Thickness	0.96 mm (± 0.2 mm)
Standard Colors	Silver, Charcoal, Black
Size	Cut to customer specifications from sheet of 91 x 122 cm (36 x 48 inches)
Forming Temperature	195°C to 200°C (383°F–392°F)
Bonding Temperature	55°C to 60°C (131°F–140°F)




Contact us for more information:

e contact@toraypmc.com

t +1 805 482 1722 (USA)

PRODUCT DATA SHEET

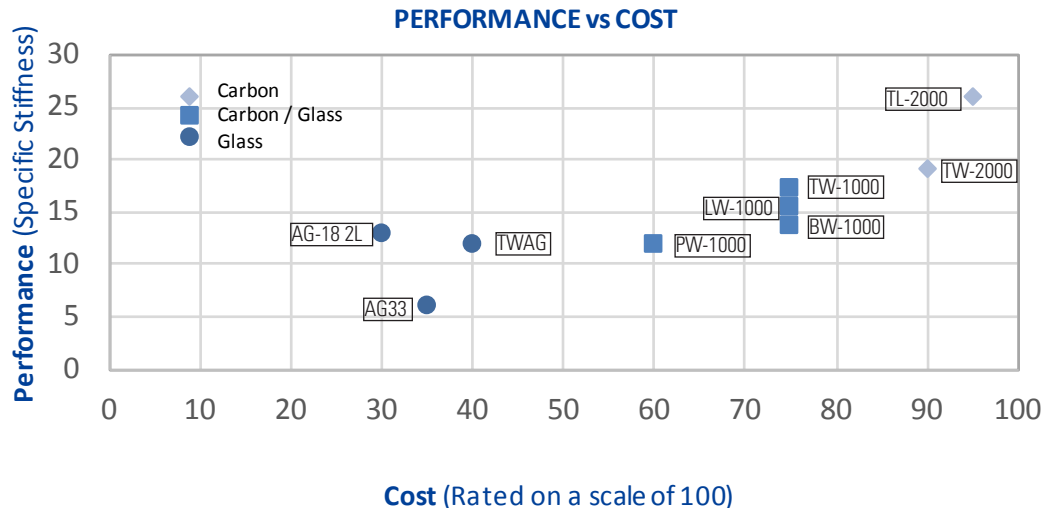

MECHANICAL PROPERTIES

Properties	Method	Results
Flexural Rigidity	ASTM D790-10	> 101 N-cm*
Flexural Strength	ASTM D790-10	> 247.5 MPa*
Flexural Modulus	ASTM D790-10	> 12750 MPa*
T _g	ASTM D3418-15	110°C

*Performance results are based on 0.96 mm material thickness. Results will vary depending upon material thickness.

© 2019. All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are processed and tested are key to their performance, and Toray Performance Materials Corporation has no assurance of how its customers will use the material, the corporation cannot guarantee these properties. Toray®, (Toray) CFRT®, and all other related characters, logos, and trade names are claims and/or registered trademarks of Toray Industries Inc. and/or its subsidiary companies in one or more countries. Use of trademarks, trade names, and other IP rights of Toray Industries Inc. without prior written approval by such is strictly prohibited.